MODEL: 4.5 to 6 tonne trailer models

Multispread



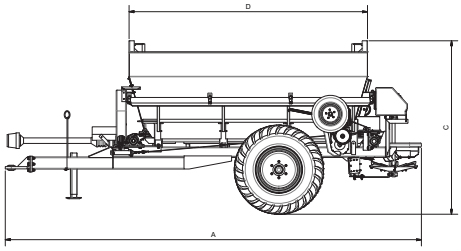

The 4.5 and 6 tonne capacity Multispread machines are versatile spreaders designed for medium sized farming enterprises.

Model	845T-L	945T-L	860T-L	960T-L
Nominal Load/Volume	4500kg / 3.8m3		6000kg / 4.9m3	
Hopper Feed Type	Chain/Belt	Endless Belt	Chain/Belt	Endless Belt
Spinner Type/Size	Type D / 700mm diameter			
Spinner Drive - Standard	PTO (1)	Hydraulic	PTO (1)	Hydraulic
Application Rates	25 to 8000 kg/ha (with ground drive)			
Spread Widths (2)	Granulated up to 32m, non-granulated up to 12m			
Speed (Paddock)	25 km/hr (loaded)			
Speed (Road)	80 km/hr (unloaded)			
Ground Drive Feed	Jockey Wheel / 20:1 Gearbox / 4 speed (3)			
Length Overall A	5245mm		5245mm	
Width Overall B	2470mm		2520mm	
Height Overall C	1840mm		2185mm	
Weight Overall - Nett	1765kg	1815kg	1915kg	1965kg
Hopper Length D	3000mm			
Hopper Width E	2200mm			
Wheel Track F	1960mm			
Axle	80mm SQ / 6 stud		100mm SQ / 10 stud	
Tyres	500/60x22.5 12 ply		550/60-22.5 12 ply	

(1) Available with optional hydraulic spinner drive (2) Allowing for wind conditions, machine settings and fertiliser consistency (3) Available with optional hydraulic feed belt drive to suit VR controller

Model : 4.5 to 6 tonne trailer models

Marshall Multispread has built a strong reputation in Australian Agriculture as the number one selling all-purpose fertiliser spreader with over 9500 manufactured since the early 1980's.
The 4.5 and 6 tonne capacity Multispread machines are versatile spreaders designed for medium sized farming enterprises, available in the economically priced chain/belt feed 800 Series and the 900 Series with its heavy duty PVC endless feed belt.

800 Series Models 845T-L & 860T-L Standard Equipment
The feed system on the 800 Series machines includes a 2ply rubber belt attached to a high-grade calibrated 10mm chain and drive sprockets, supported by wear resistant nylon skids ensuring a positive drive. The standard spinner drive is via the tractor PTO (with Hydraulic spinner drive available as a popular option).

900 Series Models 945T-L & 960T-L Standard Equipment
With its endless belt feed system, the 900 Series has a proven record for long service life. The belt is manufactured from heavy duty fabric woven PVC which is driven by an industrial grade rubber-lagged pulley and supported by low maintenance stainless steel rollers. To aid belt tracking, troughing rollers are fitted inside the chassis and a front cage roller is used for quick and easy adjustment of belt tension. Hydraulically driven spinners with electronic tacho are standard.

D Type Spinners - Standard on all 4.5 & 6.0 Tonne Models
The D Type spinner configuration has an overall diameter of 700mm, with four vanes and a stainless steel fertiliser chute for optimum placement of product onto the spinner discs. Two sets of vanes are supplied with the spreader, the D1 type for spreading non-granulated products and the D2 type for granulated fertilisers. With the D1 configuration, spread widths up to 16m can be achieved for Lime, Gypsum, Composts and Mulch. With the type D2 configuration, spread widths up to 36m can be achieved for granulated fertilisers such as Urea, DAP and Superphosphate. Minimal adjustment to the spinner setup is required when switching between fertiliser types. All testing during the development of the D Type spinners was carried out using the ACCU-Spread testing standard.

Ground Driven Feed belt and Application Rates
A rubber jockey wheel, 20:1 gearbox and combination of 4 sprocket sets provides an application rate range between 20kg/ha and 8000kg/ha independent of ground speed. Simple rate charts for popular fertilisers and the Marshall Multispread mobile calibration app are provided to ensure accurate calibration of fertiliser applications rates.

OPTIONAL EQUIPMENT:
Hydraulic Spinner drive, Roll Tarps, Hopper Screens, 3m Track, Loadcell Weighing System, Marshall Multispread MDC app for Variable Rate (VR) application of fertilisers, 3rd party VR controller integration, Feed Door Camera Kit

800 Series Models 845T-L & 860T-L Standard Equipment

900 Series Models 945T-L & 960T-L Standard Equipment

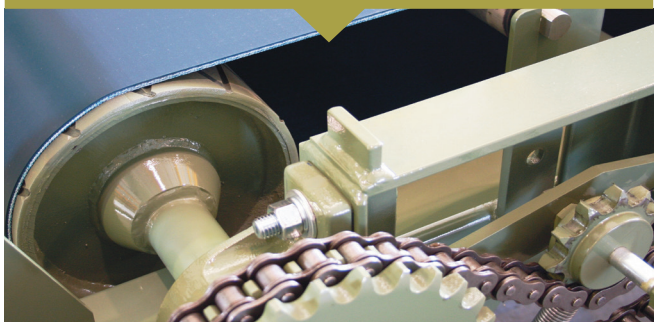

Ground Driven Feed belt and Application Rates

D Type Spinners - Standard on all 4.5 & 6.0 Tonne Models

To find out more visit
marshallmultispread.com.au
or call 1800 651 288

MARSHALL MULTISPREAD